

# B Series - B01

## 3 kg (7 lb) Capacity

### Horizontal Balancing Machine




#### HORIZONTAL AXIS, TABLE TOP, SOFT BEARING, BALANCING MACHINE

#### DESCRIPTION:

The Model B01 is a dynamic, horizontal axis, soft bearing Balancing Machine. This is a precision balancing machine that can be used with any IRD Balancing instrument. It is suited for balancing small, lightweight rotors such as those found in small high speed machines. The machine is of lightweight construction and can be mounted on a rigid tabletop or workbench. Two work supports with rollers and an integral height adjustment are used to support the rotor journals. Both work support pedestals can be moved on the machine bed to accommodate different length rotors. The drive system consists of a DC variable speed motor with a belt drive. The motor and motor controller are mounted inside the base unit. Optional V-Block rotor work supports are available. An optional pivoting, dynamic top table assembly with quick lock clamping is available for mounting self powered rotors that cannot be supported on rollers.

#### GENERAL SPECIFICATIONS:

- Weight Capacity: 3 kg (7 lb)
- Max. Rotor Dia.: 254 mm (10 inches)
- Maximum Sensitivity: 0.015 g mm (0.0006 g in)
- Standard Bed Length: 450 mm (17.7 inches)
- Journal Diameter Range: 2 - 30 mm (0.08 - 1.2 inches)
- Journal-to-Journal Separation: 25 - 400 mm (1 - 15.7 inches)

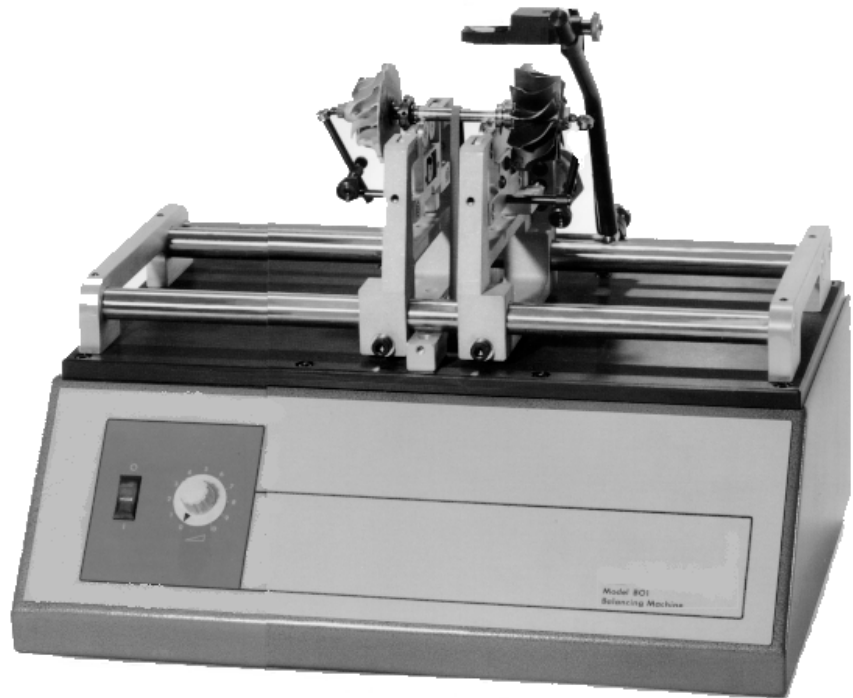

- Drive Type: Underslung Belt Drive
- Drive Motor: DC 0.095 kW (0.13 HP)  
Variable speed motor with encoder
- Balancing Speed Range: 500 to 10000 RPM
- Number of Balance Planes: 1 or 2
- Encoder output port: Used by IRD balancing instruments for determining rotor angular position
- Standard Accessories: (3) Flat drive belts, (3) O-Ring drive belts, roller work supports, mounting arm for photocell, end thrust assemblies.
- Tabletop configuration:
  - Dim: 520 x 480 x 350 mm (l x w x h)
  - Weight: 25 kg (55 lb)
  - Power: 120 or 230VAC, 50/60 Hz
  - Temperature: Operating -10 to +50° C

#### OPTIONAL FEATURES:

- V-Block Rotor Work Supports
- Dynamic table top assembly for self powered rotors
- Underbelt tangential belt drive assembly
- 236 Desktop Balancing Instrument
- 246 Portable Balancing Instrument

## STANDARD CONFIGURATIONS:

B01Package	Brief Description	Detailed Description
E44726	Complete B01 Balancing System with 0.095 kW (0.13 HP) 3000 RPM, DC motor for <b>120VAC</b> Operation	Complete B01 Balancing Machine that includes a table top machine bed, 2 movable pedestals, 2 roller work supports with height adjustment, drive motor with encoder, motor controller, drive belts and manual. For 120 VAC operation. This machine does not include a balancing instrument or sensors which must be purchased separately.
E44727	Complete B01 Balancing System for <b>230VAC</b> Operation	Same as E44726 above, except for 230 VAC operation.
E36700	<i>B01/S Balancing System with Integral Balancing Instrument, 120VAC</i>	<i>Similar to E44726 except with built in balancing instrument. See B01/S brochure for more details</i>
E44728	<i>B01/S Balancing System with Integral Balancing Instrument, 230VAC</i>	<i>Similar to E44727 except with built in balancing instrument. See B01/S brochure for more details</i>

Part Number	E44726 and E44727 include
-	Basic B01 balancing machine with drive motor, adjustable roller work supports and motor control
E70029	Flat drive belt, 6mm wide x 360mm long (0.24 X 14.2 in)
E70030	Flat drive belt, 6mm wide x 400mm long (0.24 X 15.7 in)
E70031	Flat drive belt, 6mm wide x 500mm long (0.24 X 19.7 in)
E71043	Round drive belts (O-Ring) set of 3, 1.78 mm diameter x 340/400/420mm lengths
E19643	AC Power Supply Cable with US plug US, 3 m
E70044	Operation manual for B01 Balancing System-English
Part Number	Balancing Instrument Options
E00304	Model 236 Desktop Balancing Instrument with all accessories needed for balancing. Includes the 236 Balancing Instrument, two 546DP (direct prod) sensors, two magnetic tips for the 546DP sensors, photocell, photocell reflective tape and all cables.
E00310	Model 246 Portable Balancing Instrument with all accessories needed for balancing. Includes the 246 Balancing Instrument, two 546DP (direct prod) sensors, two magnetic tips for the 546DP sensors, photocell, photocell reflective tape and all cables.

email: [sales@irdbalancing.com](mailto:sales@irdbalancing.com)  
web: [www.irdbalancing.com](http://www.irdbalancing.com)

Part Number	Other Options, Accessories, and Supplies
E71031	Roller cartridge assembly with (2) 19mm Diameter rollers. Rollers not sold separately.
E71034	Rotor safety hold downs, 2 included
E71144	V-block Rotor Work Supports, 2 included
E71041	Dynamic table top assembly for self powered rotors
E71160	Underbelt (tangential) belt drive assembly
E41874	AC Power Supply Cable with UK plug
E41554	AC Power Supply Cable with European plug
E41626	AC Power Supply Cable with Australian plug
E41952	AC Power Supply Cable with S.Africa/India plug
E71201	Flat drive belt, 6mm wide x 480mm long (0.24 X 18.9 in)
E48666-530	Flat drive belt, 6mm wide x 530mm long (0.24 X 20.8 in)
E48666-540	Flat drive belt, 6mm wide x 540mm long (0.24 X 21.2 in)
E71202	Flat drive belt, 6mm wide x 560mm long (0.24 X 22 in)
E71203	Flat drive belt, 6mm wide x 600mm long (0.24 X 23.6 in)
E02785	546DP Vibration sensor only- no magnetic tip
E10170	Magnetic tip for 546DP vibration sensor
E04521	Cable for use with 544/546DP vibration sensor, 3.6m/12'
E21000	Photoelectric speed sensor, standard, reflective tape trigger, 25-610 mm range
E11689	Cable for use with E21000 photoelectric speed sensor, 1.5m/5'
E47255	Infrared speed sensor, 12Vdc, light/dark trigger, 100-150 mm range
E47254	Cable for infrared speed sensor to 236,246,290, 10m/32.8'
E21200	Reflective tape for use with speed sensor, 47.5m/150'
E47165	Scale, 120 gram capacity, portable, battery operated.
E11820	Balancing wax, sold by the pound
E32147	Epoxy balancing weight compound, 2 lb package
E04753	Balancing weights, set of 16, C-shaped with set screw
E11946	Balancing clips for squirrel cage fans (7 sizes of 100 ea)

### IRD Balancing Offices (IRD LLC)

USA: Global Headquarters and Factory- IRD LLC, 4740 Allmond Ave, Louisville, KY 40209 USA

Tel: (1) 502 366 0916 or (1) 888 473 2251 (US Toll Free) Fax: (1) 502 238 1001

Europe/UK: IRD UK Ltd, International House, Aviation Park, Flint Road, Saltney Ferry, Chester CH4 0GZ, UK

Tel: +44 (0) 1244 538 170 Fax: +44 (0) 1244 528 900

Mexico: IRD Balancing-Mexico S. de R. L. de C.V., Miguel G. Kramer #29, Col. Atlantida, Mexico D.F., MX 04370

Tel: +52 55 5689 8325 Fax: + 52 55 5689 8160

Specifications are subject to change without prior notice.

Publication No: BAL-314-EN-5 (Revised 16 Jun 2008)

Copyright © 2008 IRD LLC (IRD® Balancing). All rights reserved.

Part Number E51221