


General Specifications:

- ◆ **Weight Capacity - 45.4 Kg (100 LB) per pair**
- ◆ **Max. Rotor Dia. - 229 mm (9 inches) over V-Bearing mounting surface with a 13 mm (0.05 inch) diameter journal**
- ◆ **Minimum Achievable Residual Unbalance - 0.127 mm (0.000 005 inches) mass center displacement (Mounted on B5 Work Supports) 0.9 g-mm (0.001 oz-in) - typical**
- ◆ **Height Adjustment - 13 mm (0.5 inches) total**
- ◆ **V - Bearing material - Delrin**
- ◆ **Can be mounting on B5, B10, B20 or B50 Balancing Machine**
- ◆ **Journal Diameter Range - 13 - 76 mm (0.5 - 3 inches)**
- ◆ **Work Support Width - 10 mm (0.375 inches)**
- ◆ **Supplied with End Thrust Assemblies**

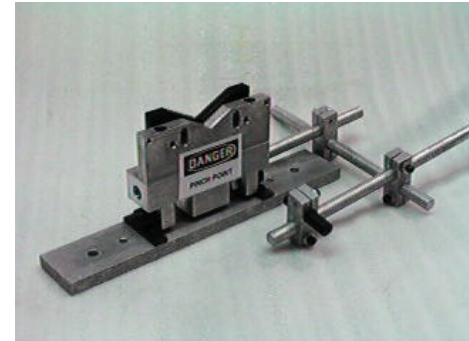

Optional Accessories:

- ◇ 51 mm diameter x 11 mm wide (2 inch diameter x .4 wide) Roller Bearing Assembly
- ◇ Oiling System for continuous lubrication
- ◇ Offset adapter plate to reduce minimum center to center distance
- ◇ Safety Hold Down Assembly

Standard Configuration:

Model No.	Part Number	Description
S 100	30600	45 Kg (100 LB) Assembly (2) Required

Corporate Headquarters
 1700 Edison Drive
 Milford, Ohio
 USA 45150
 Phone: (1) 513 576 6151
 Fax: (1) 513 576 6104
 www.entekird.com

Australia Operations
 Suite 502
 655 Pacific Highway
 St. Leonards, NSW
 Australia 2065
 Phone: (61) 2 9436 4422
 Fax: (61) 2 9436 4355

China Operations
 Ceroil Plaza
 Room 901/902
 9 Yide Street, Zhongshan Dist.
 Dalian 116001, China
 Phone: (86) 411 265 6584
 Fax: (86) 411 265 6627

Europe Operations
 Bumpers Lane
 Sealand Industrial Estate
 Chester
 UK CH1 4LT
 Phone: (44) 1244 374914
 Fax: (44) 1244 379870